

AI PoE Switch


GNT-P9109EA

- Total 120W Power Supply
- 8 ports PoE
- 1 port Uplink

Product Features


- AI Watchdog Function
- 6KV Lightning & 8KV ESD Protection
- Support bt 60W High Power
- Auto-Adaption 250m Transmission

Ports Description

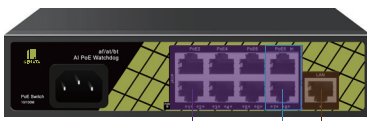


- 1 100Mbps PoE Ports
- 2 bt 60W Power Ports
- 3 100Mbps Uplink Ports

Dimension (mm)

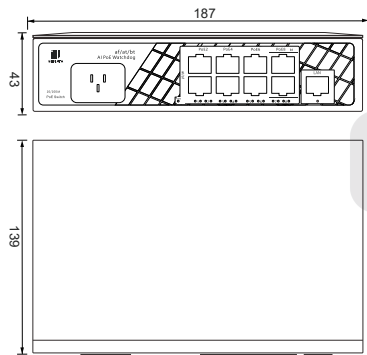

Installation Diagram



Specifications

| | |
|---------------------------|---|
| Model | GNT-P9109EA |
| Ports | PoE (1~6):10/100Mbps PoE ports (RJ45) PoE (7~8):10/100Mbps PoE ports (RJ45),Support bt 60W High Power LAN:10/100Mbps uplink port (RJ45) |
| Transmission Rate | 200Mbps Full Duplex; 10 or 100Mbps Half Duplex |
| Transmission Distance | 100Mbps /10Mbps, Auto-Adaption 250m |
| Performance Specification | Bandwidth:1.8Gbps |
| | Network Latency (10 to 100Mbps): $\leq 16\mu s$ (use the 64byte package size) |
| | MAC address table: 2K |
| | The Frame Filter & Transmission Rate: 14800pps the most for 10M port, 148800pps the most for 100M port |
| Networking Standard | IEEE 802.3i 10BASE-T |
| | IEEE 802.3u 100BASE-TX |
| | IEEE 802.3x Flow Control |
| | IEEE 802.3af/at/bt Power over Ethernet |
| Power Support | Power Input: AC 90~240V Total $\leq 120W$ AI Watchdog: Port 1~8 Power Output: PoE 1~6 Port:1/2(+52V),3/6(GND) $\leq 30W$ PoE 7~8 Port:1245(+53V),3678(GND) Compatible1/2(+52V),3/6(GND) $\leq 60W$ |
| Protection Level | Lightning Protection:6KV ESD Protection:8KV |
| Physical Specifications | Size(L*W*H): 187mm*139mm*43mm, Weight: 1.0KG |
| Working Environment | Operating Temperature: -30°C~60°C |
| | Storage Temperature: -40°C~70°C |
| | Operating Humidity: 10%~90% Non-condensing |
| | Storage Humidity: 5%~90% Non-condensing |
| Certification | CE Mark |
| | FCC Part15,Class B |
| | RoHS 2.0 |
| Warranty | Whole Device: 1 year |
| Package Content | AC Power Cable,User Manual |